
7

VH 2024 1552 2027 1 15

° m'

6.3 "

"

.....

6.4

.....

7

7.1

7.2

.....

7.3

7.4

8


8.1

8.2

8.3

8.4

9

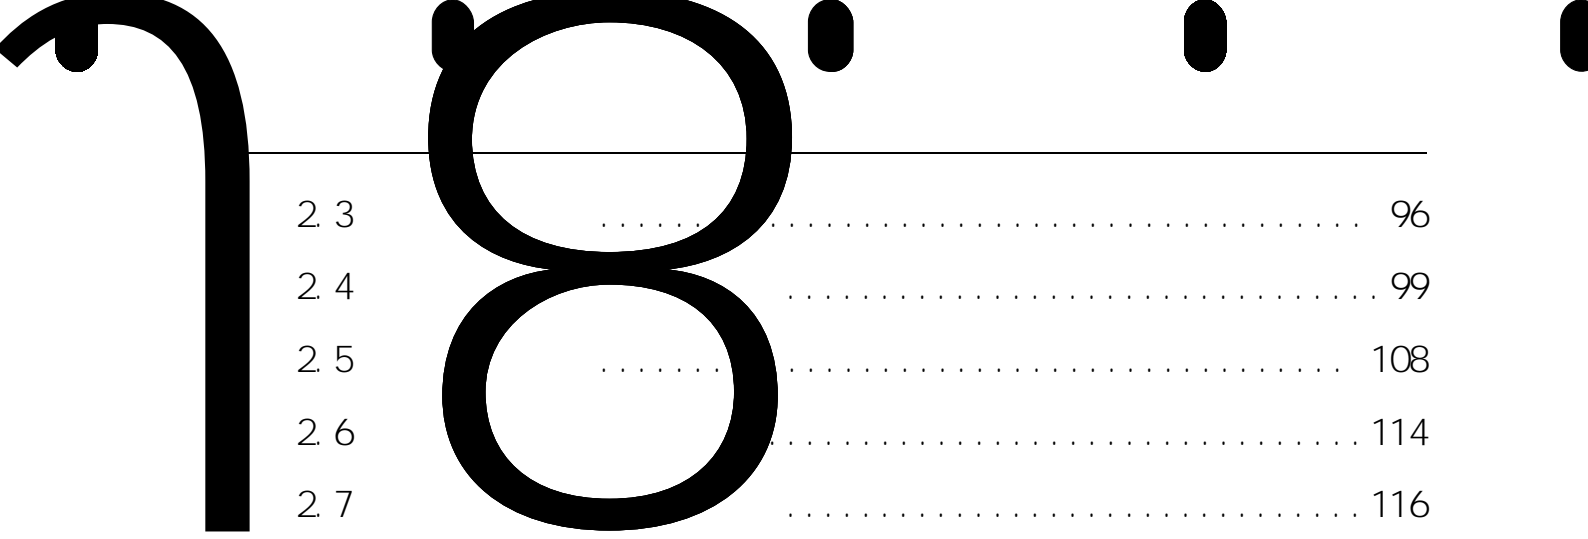

2 3	96
2 4	99
2 5	108
2 6	114
2 7	116
3	117
4	118
5		

		mm	67.8
		mm	171.1
		mm	218.0
		mm	1050.2
		mm	370
		kg/m ²	40
	10m	m/s	31.0
		kg/m ²	60
			SE
			N
			N
		d	22.2
		d	30
		d	11
		mm	930
		month	4
			1.5
		month	6~9
		m	2.99
		m	0.5
		m	1.6
		m	-0.81
	3~8	7	1000m
		25~46d	28d
			7
			3



2.1.4

1

2.1.4-1

2.1.4-1

		m ²	m					
1		1108.26	8.1					
2		1837	6.8					
3		369	5.5					
4		1235	5.5					
5		651.77	5.5					

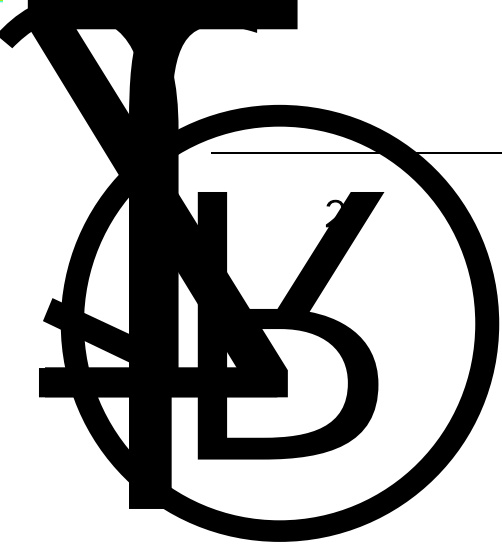

			m	m		
			2.5			
1 2 5 6 10t			15	88	GB51283-2020	4.2.9
			20	200	GB51283-2020	4.1.6 5
			30	300	GB51283-2020	4.1.6 5
			30	300	GB51283-2020	4.1.6 5
			15	34.33	GB51283-2020	4.1.6 5
			10	134	GB50016-2014(2018 3.4.1	
			10	134	GB51283-2020	4.1.6 5

3

2.2

2.2.1

1

2.2.1-1

2

2.2.1-2

2.2.1-2

2.2.2

1




2.2.2-1

2



2.2.2-2

3

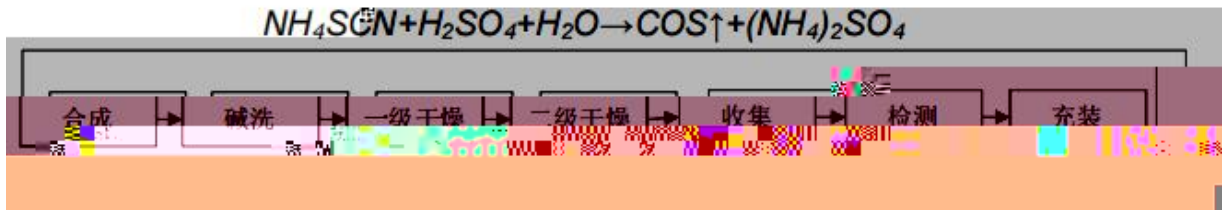

2.2.2-3

2.2.3

2.2.3-1

2.2.3-1

2.3

2.3.1



1

66kV

66kV

2

3150kVA

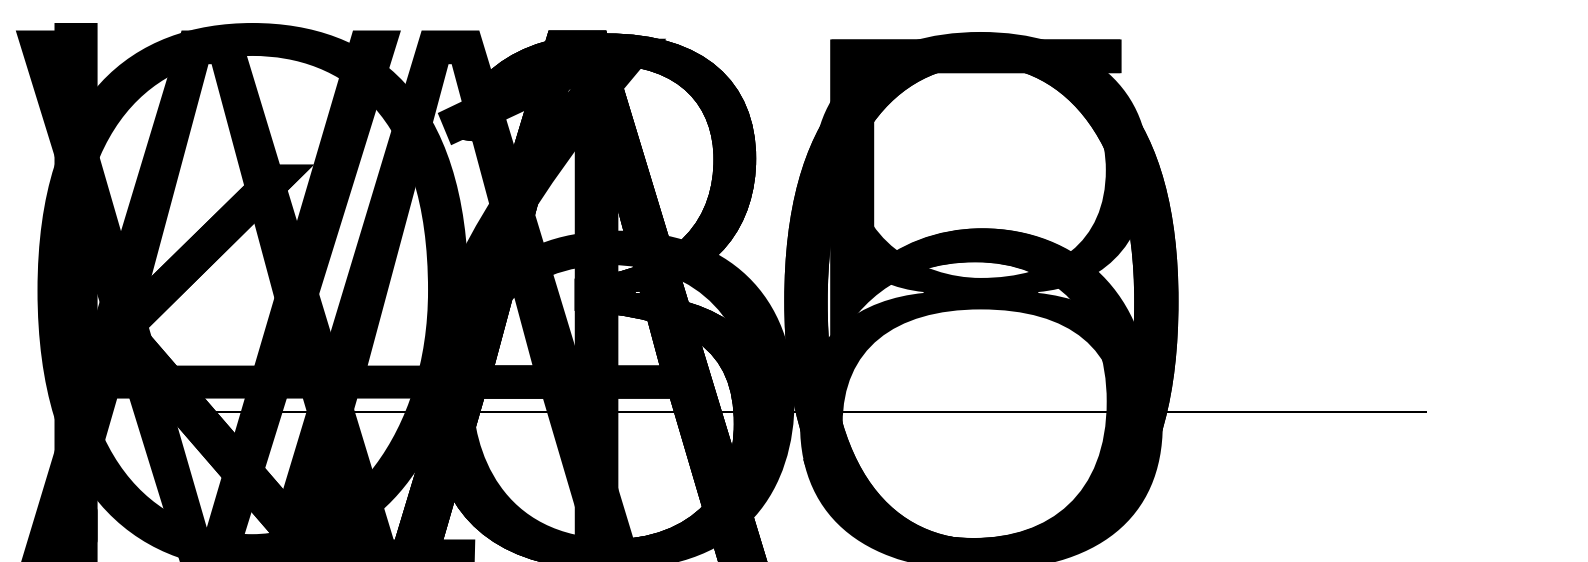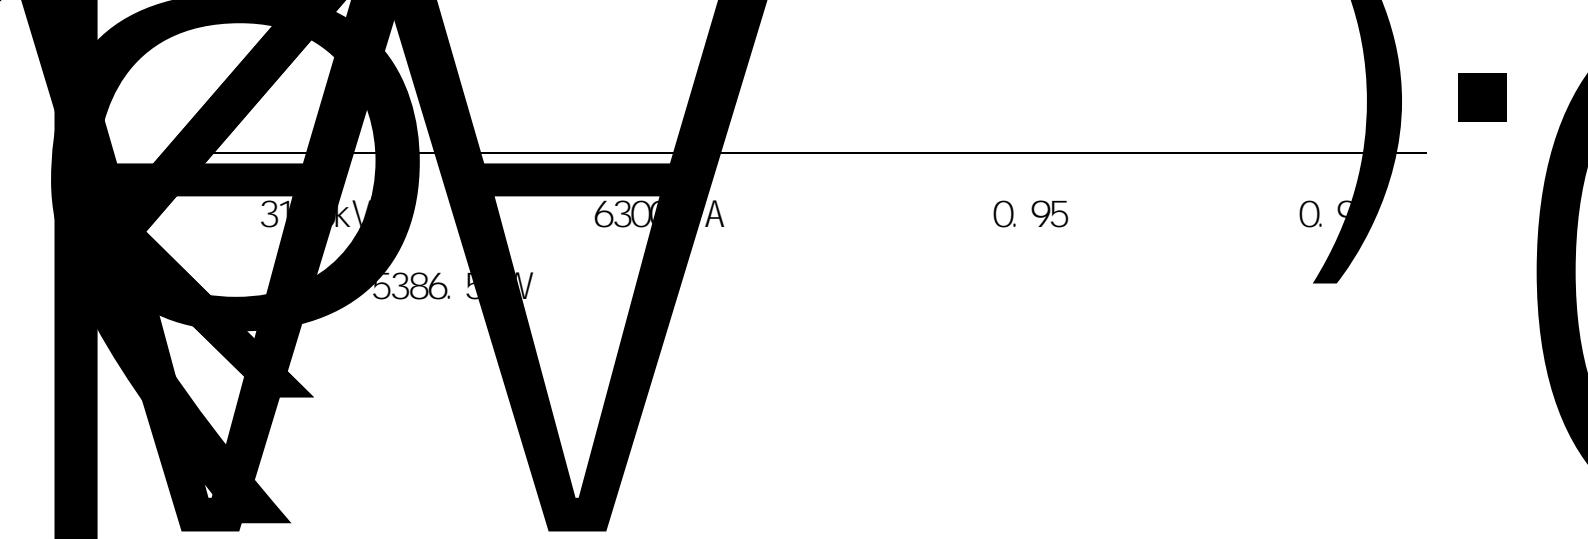

1
40MPa

5

1

120m

12

2

3

1. 3m

2. 4m

4

2. 3. 6

1

2. 3. 7

PLC

1

2

3

PLC

ë

2.3.8

I P65

4

20mA

DCS

UPS

2.3.10

1

2

3

2.3.11

UPS

30d

GDS

/

/

GDS

/

/

25%EL

50%EL

100%EL

200%EL

2.3.12

Exdl I CT4

Exdl I BT4

2.3.13

1

2.5km

5min

2

27km
2 3. 14

30mi n

2 4

4

4. 1

4. 2

4. 3

4. 4

4. 5

4. 6

Woods

5

5.1

5

5.1-1

1		
2		
3		
4		
5		

5.2

5.2-1

5.2-1

-
- 1
 - 2
 - 3
 - 4
 - 5
-

6

6.1

6.1-1

6.1-1

1

2

6.1-2

						%			mg/m ³			
	2629		, 1 A	-83.8	-81.8	2.1-80	305					
	1289		, 1 - 2* 1	-60.4	-85.5	4-46	260		10			
	1302		/ , 1A / , 1	330	10.5				2			
	2117		, 1 - 3	-50.2	-138.2	12-28.5						
	1669		/ , 1A / , 1	1390	318.4				0.5			
	172			-195.6	-209.8				/			
DMF	460		, 3 / , 2 1B	152.8	-61	2.2-15.2	445	58	10			
	137		3.1	56.5	-94.6	2.5-13	465	-20	400			

3

1.5

6.4

4.3

SI S

GDS

"

"

PLC

HAZOP

HAZOP

7.1.2


7.1.3



4
N©



m'



f

7

8

7.2

7.2.1

1

2025

5

2

"

"

3

4

6

7. 2. 1-1

5

7.2.1-2

6

7

7.2.1-3

8

10

2024 12

2024 12 30

210213-20241230-16096


1 3

2 20

3 17

3#

2025

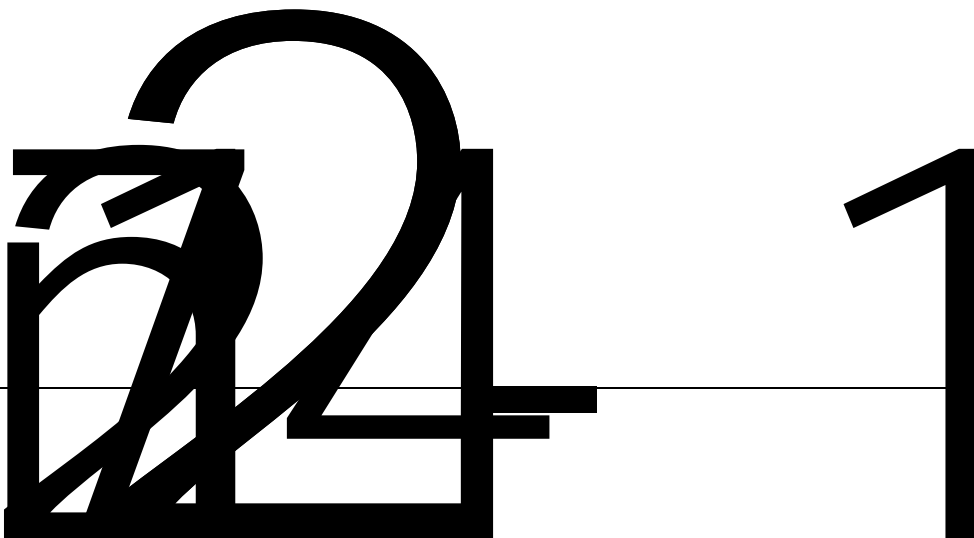A large, bold, black graphic element at the bottom of the page, resembling a stylized signature or logo. It features a prominent, curved, hook-like shape on the left side, followed by a vertical bar and a horizontal bar, and a large, vertical, slightly curved bar on the right side. The overall appearance is that of a stylized '2' or a similar character.

3

4

5

t

6

7

8

10

d m'

ΒΒΣΣΟ (ΠΕΠ) ΗΡ "ΙΣΣ" ΟΕ

ΞΤ +Χ

11

d

ΑΥΑ.Ο° (ΠΟΡ ΣΗΡ" .Σ, €Dë ø(P HP Âb,, €ÑJÔ

Ä

?ô•

Û

30B 1,0 >ø(B 80VθI

GBØ BDP (B B HB ΛB B b ΛZ€λbD2

↓ (αE. '•υ0 L,"... .il(αE. E@

2(αE. '•υ0 L,"... .il(αE. E@

8

1

8.3

8.3.1

8.4

8.4.1

1

"• n

2022 6 7

12 28

12 54

q

12 &é

13 32

13 35

13 36

13

42

0.5ppm

25ppm

119

14 25

15 17

2

15 19

16 30

1ppm

18 7

2

1

8kg

2

g

8.4.2

2022 1 8 14 57

**

100

1

2022 1 8 14 08

12

14 09

**

12

14 20

**

12

14 25

**

**

"

"

**


(

)

**

12

**

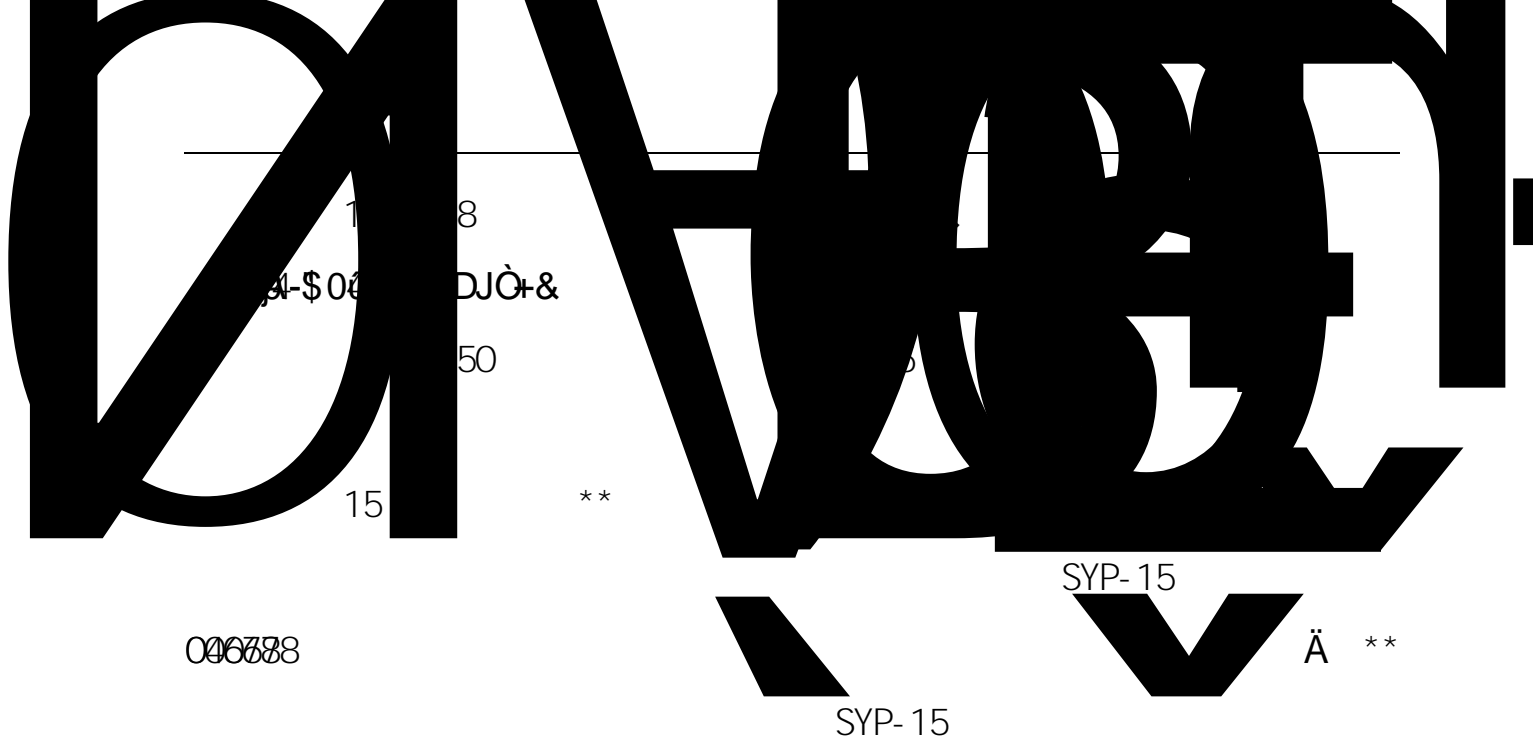

040678

SYP-15 Ä

040678 Ä

* E~~8~~'DF ^JÒ ^ 0^aJÒ Fr 6+CF
85Q P tR P,@
0 2
E- SYP-15 ** f
Ä Ä 7 0/6
i SYP-15
+& +O{ -E E ^ F ^ 5F JÒ JÒ



1. 5% 10%


3

1

**

1. 5% 10%

2





3

10.2

" "

4

10.5

GB

30871



1
1.1

DMF

1.1-1 8

1.1-1

0.62	26.04	-80.8	-83.8	1.17g/L	=1
4460kPa(20)	=1	0.91	6.19MPa	35.2	
	2.1%	80%		305	0.02ml

15

--


10m

0.05MPa

--

10m

10 0

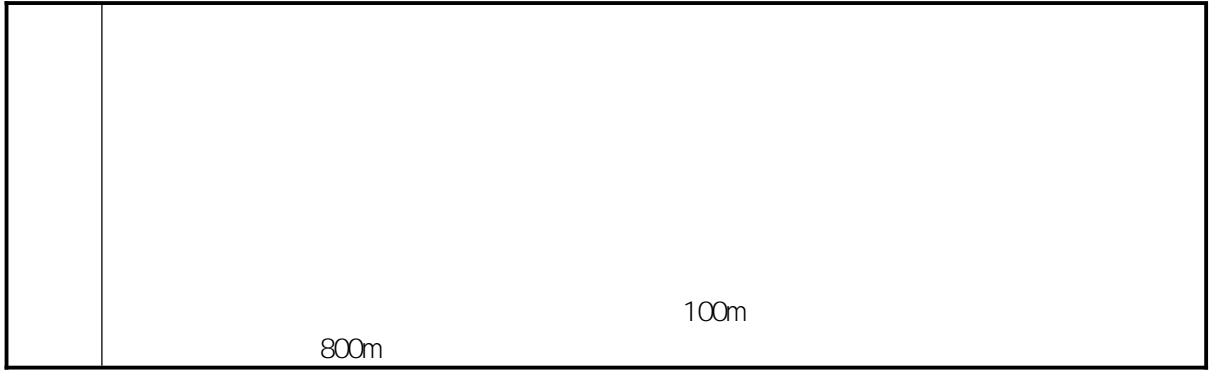

1. 1-2
Hydrogen sul fi de

H₂S

34.08	-85.5	-60.7	1	1.539g/L
=1 1.19	9.01MPa	100.4		2026.5kPa(25.5

1

2

3

	-138.2	
	-50.2	(=1) 1.24(-87)
	(kPa) 1204.23(21)	(=1) 2.1
		%(V/V) 12-28.5

1. 1-6

CAS 1310

Sodiun hydroxide Caustic soda
NaOH

1. 1-7

acetone

C3H6O
31025

58.08

CAS

67-64-1

-94.6

56.5

28

1. 1-8

ni trogen

N₂
22005

28. 01

CAS

7727 37 9

	kPa 3.46 60	=1 2.51
	58	445
	%(V/V) 2.2-15.2	
	<50	
		15

1.2

Ã

1.2.1

1

1

3

1

2

3

4

1

2

3

4

5

6

7

8



6

1.2 2

1

1

2

2

13.3KPa

1. 2. 3.

1

2

3

4

5

6

5

PE

6

7


8

9

10

1.2 6

1

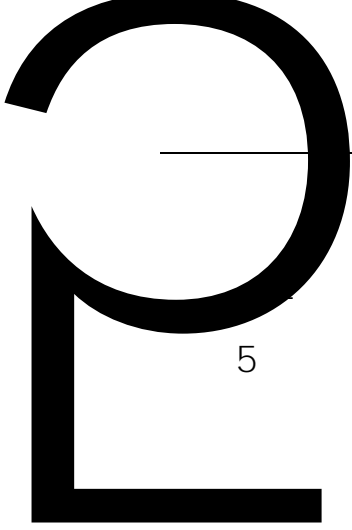

5

2

3

4

5

6

1.2 9

Ḓ

1

2

3

4

5

1. 2 11

1

1

2

3

2

85dB A

1. 2. 12

1

1

2

3

4

5

6

7

2

3

1

2

4

1

1. 2 14

1

1

2

3

4

5

2

1

2

3

4

5

2
1

2
1

2

3

1. 2 16

1.3

1.3-1

98%

0.5%

1

2


2

	GB 7231		
	30	1. 2. 3. 4.	

1.4

2013

1.5

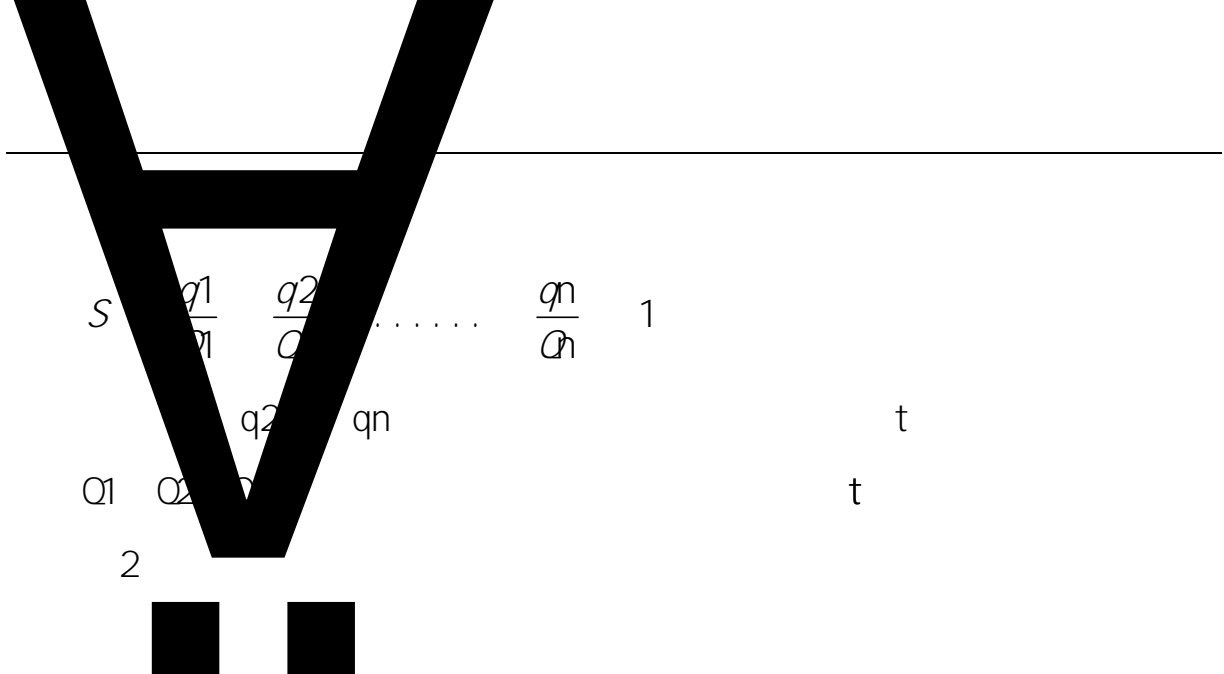

©GB 18218-2018

1

R

2 R

$$R = \alpha \left(\beta_1 \frac{q_1}{Q_1} + \beta_2 \frac{q_2}{Q_2} + \dots + \beta_n \frac{q_n}{Q_n} \right)$$

q1 q2 ... qn —

Q1 Q2 ... Qn —

1 n

	V9. 2	1
	W10	1
	W11	1

4

500m

1. 5. 1-3

100		2. 0
50	99	1. 5
30	49	1. 2
1	29	1. 0
0		0. 5

3


GB18218- 2018

1

GB18218- 2018

	10
	20
	20
	20

1. 5. 2-6



50 99	1.5
30 49	1.2
1 29	1.0
0	0.5

5

R

1.5.2-8

R

GB/T 37243-2019

4.4

4.2

4.3

1.6.2

1

1.6.2-1

1.6.2-1


10

<30

100


1×10^{-5}

3×10^{-5}



10

标准名称：中国：《GB36894-2018》

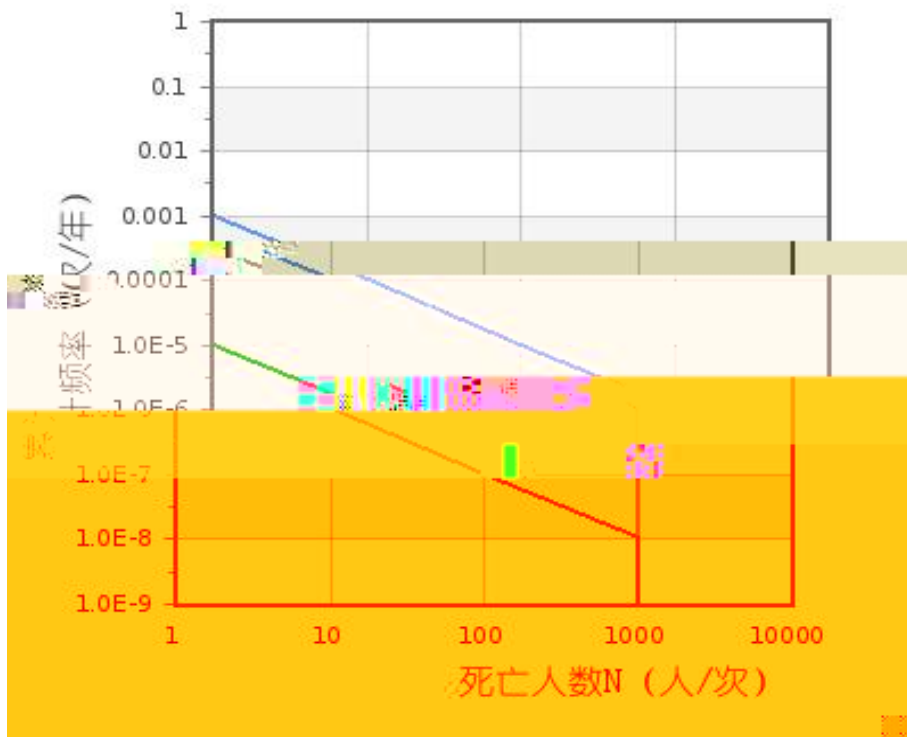

1.6.2-2

F-N

1.6.2-3

1. 6. 4

3.2.4

9



1
2

3.00h

3

1.00h 2.00h
 1

16
1
2
3

4.2.8

17

4.3.2

4.3.2

1

18

GB50016
2

5m

6m

0
4.3.3

d

19

5.5.7



23		6.4		

23

2.2

2.2-1

2.2-1

1

2024

2

3.3.4

			4.2.4	
7			4.6.1	
8			4.6.2	
9			5.2.2	
10			5.6.1	
11			5.6.2	
12			5.6.3	
13			5.6.4	
14		15 m GB 5749	5.6.5	
15	3	GB289	6.1.1	
16		GB 2894 GBZ 158	6.2.1	

17

5.7

18

6.1.1

1 4 6 1

	1 120% 2 GB/T20801.3	3		
25			5.7.3	
26			5.7.4	
27	8m	3m	5.7.5	
28	1 B A 2 3 4 5 / 6 7 8		5.7.7	

29		5.8.1		
30	1 2 3 4	5.8.3		
31	GB/T 50493 GB 50058	5.8.4	GDS	
32	a b c d	4.1.1		
33	a) b)	5.1		

44

3


4. 5. 1

3

4. 5. 4

45

b

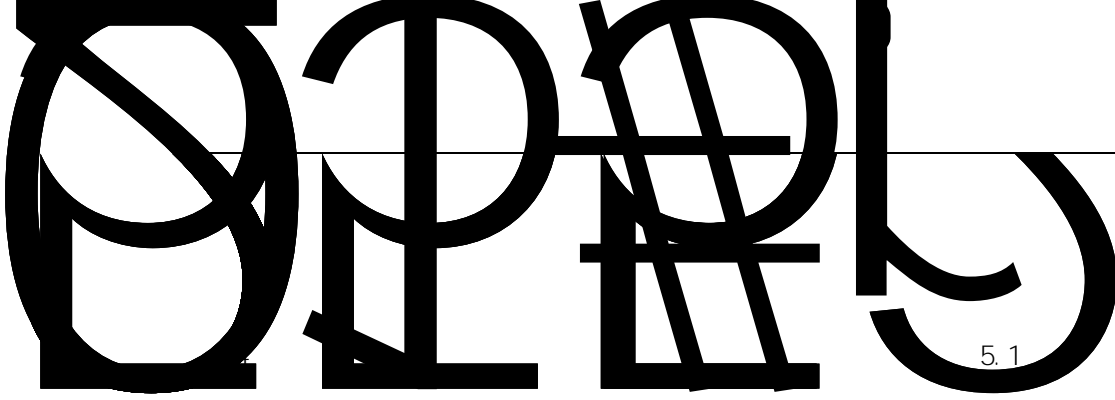

1

1

5.1

65

1.6

6

100mm

5.2

73

2008
13. 3. 2

74

1 2 7. 2. 4. 3 1 2

75

7. 3. 2


76

2.3

2.3-1

2.3-1

1	15m	5.6.5		
2	1 2 3	4.5.2		
3		6.2		
4		7.1.6		
5		7.2.1		
6		7.2.4		
7		7.2.5		
8		7.2.7		
9		8.2.1		
10		8.2.2		

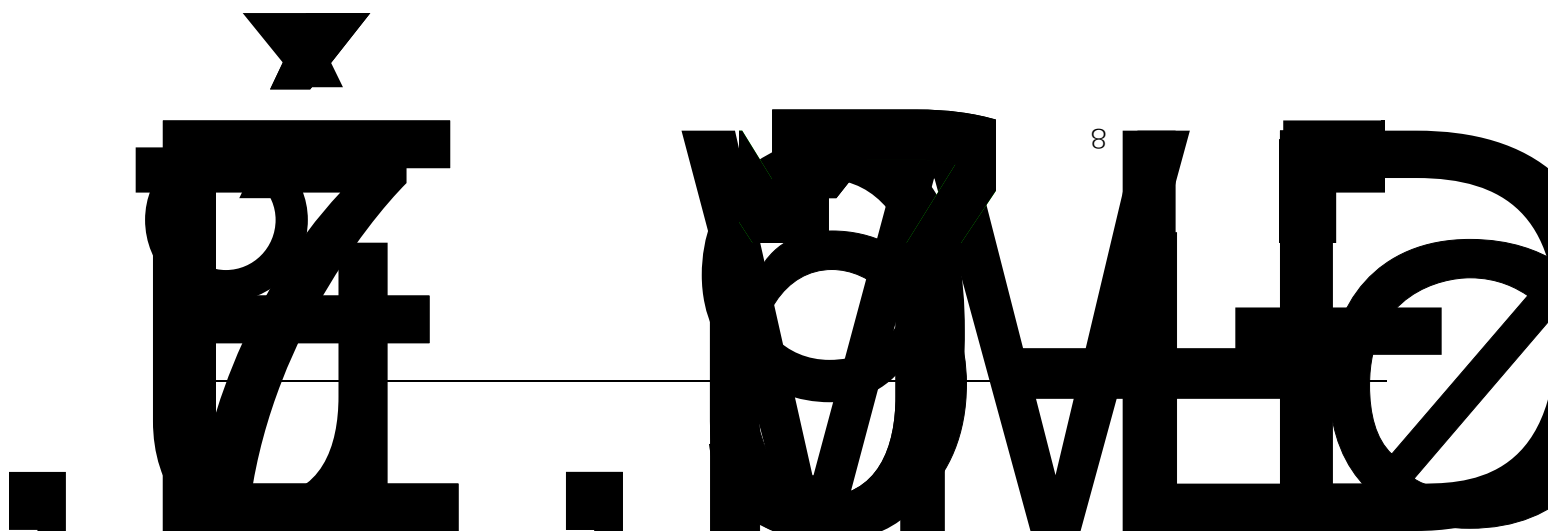

			5.4	
22	GB50016		5.8	
23			6.2.1	
24	3m		6.2.3	3m
25	1m 0.5m	0.3m 0.5m	6.8	0.5m
26			8.6	
27			8.11	
28			10.1	
29	1 2 3		7.1.2	
30	GB50351 GB51283 GB 50016		7.2.3.1	GB51283 GB 50016
31			9.1.15	

32

9.2.9


33 ()

4.2.1


34

4.2.2

35

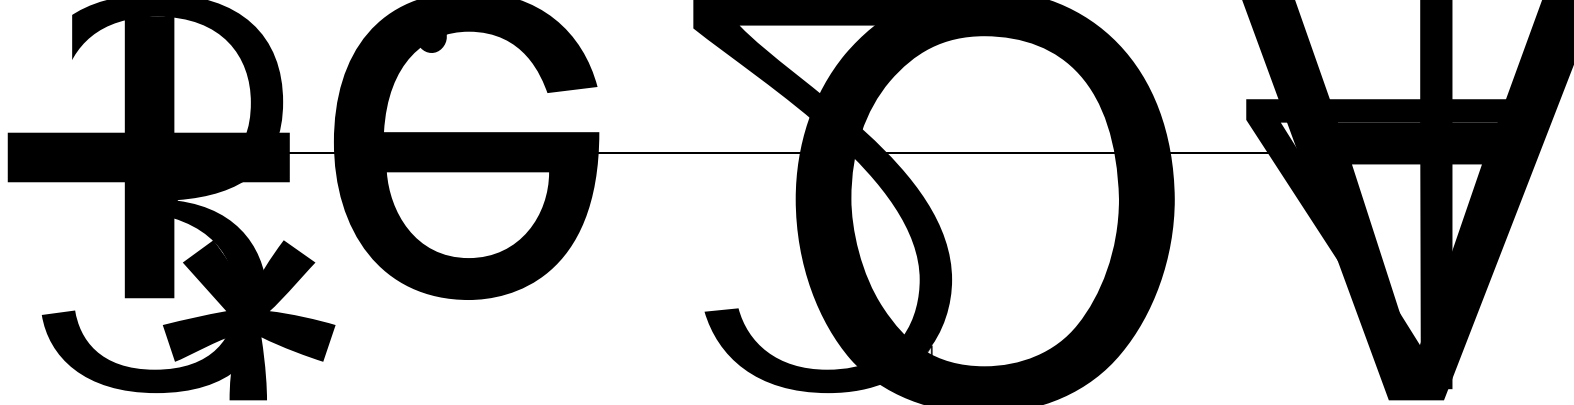

4

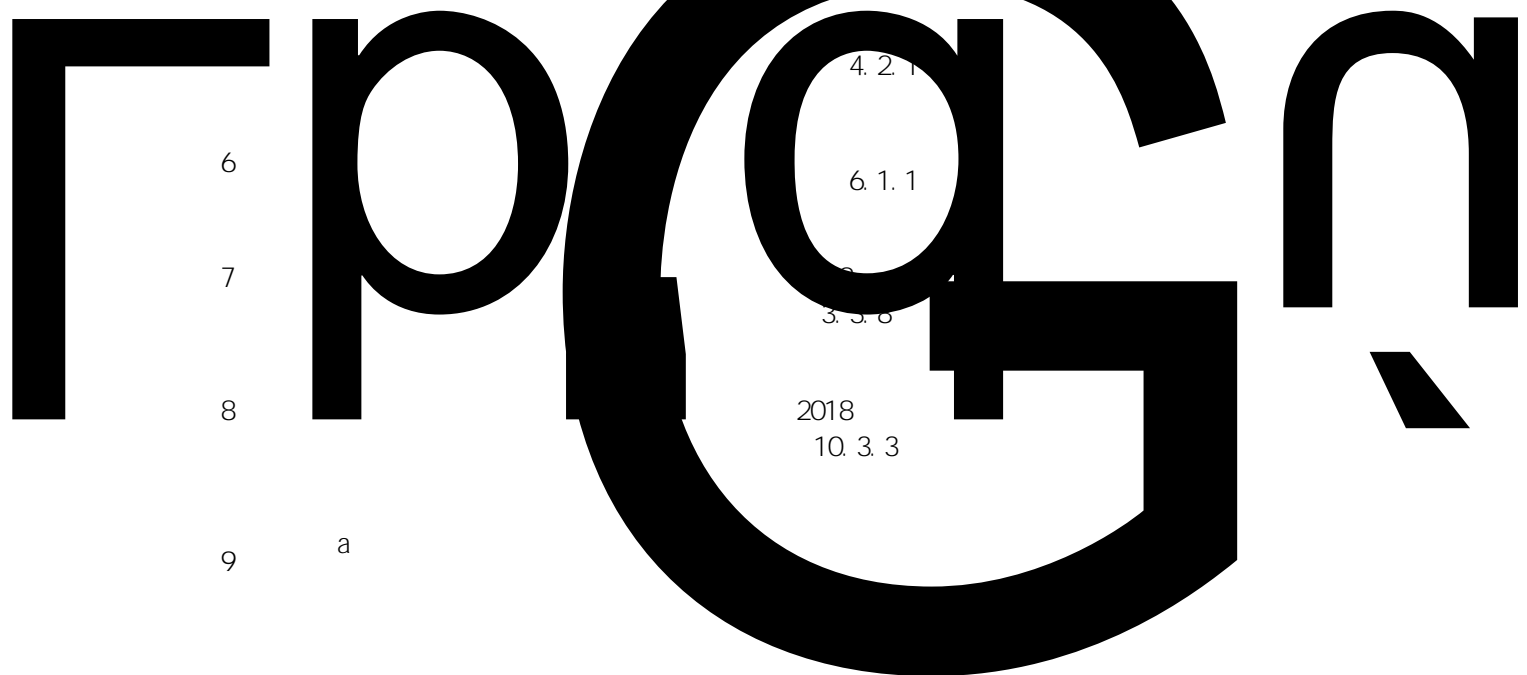

6

7

8

9

10

11

a

M

4. 2. 1

6. 1. 1

3. 3. 8

2018

10. 3. 3

5. 2. 3

		7.5.2	UPS	
16	BPCS GDS S I S UPS 30 min 3h	7.5.6	UPS EPS 3h	
17		7.5.8		
18		3.0.8		
19		4.1.4		
20		4.1.1		
21	1 1) 2) 3) 4) 2 1	4.1.2		

22	TN TN -S	6.1.2	TN-S	
23		2022 4.2.1		
24		2022 5.4.2		
25		3.4.1		
26		4.3.1		
27		5.1.2		
28	TN TN-S	5.4.1	TN-S	
29		3.0.1		
30		10.0.5		
31				

		10.0.7		
32		12.0.1		
33		12.0.5		
34		5.1.1		
35	1	7.1.3		
36	30mi n	11.1.3		
37	30mi n	3.2.4	30mi n	
38		2018 8.1.2		
39		4.1.5		
40	10L/s 320L/s	5.1.4	10L/s	
41		5.1.10		
42		5.1.12		
43				

	150. 0m 10L/s 15L/s	7. 3. 2		
44		7. 4. 3		
45		7. 4. 7		
46		6. 1. 2		
47				
48	" "		HAZOP SIL	
49	20m n~30m n 30l x~50l x 100l x	3. 5. 6		
50		3. 8. 1		
51		4. 9. 2		
52		5. 4		

3

61

5. 2. 3

62

5. 4. 3

63

5. 4. 3

64

5. 4. 3

65

5. 5. 3

66

3. 0. 1

67

3. 0. 3

68

3. 0. 9

69

4. 3. 4

70

5. 3. 1

71

IP66

5. 6. 2

IP66

72

7.15. 7

73

8. 1. 1

74

8. 2. 2

75

9. 1. 1

76

9. 1. 4

J

24h

77

3

4

5

6

7

8

9

10

11

12



17



18

19

26

27

(, m'

33

AQ/T 3034

9.1.7

34

9.1.9

1

35

2

9.1.16

() 9

SDS

2451U

36


SDS

9.2.11

GB/T 17519 GB 15258

37

2			
3	" "		
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14		UPS	
15			
16			
17			
18			

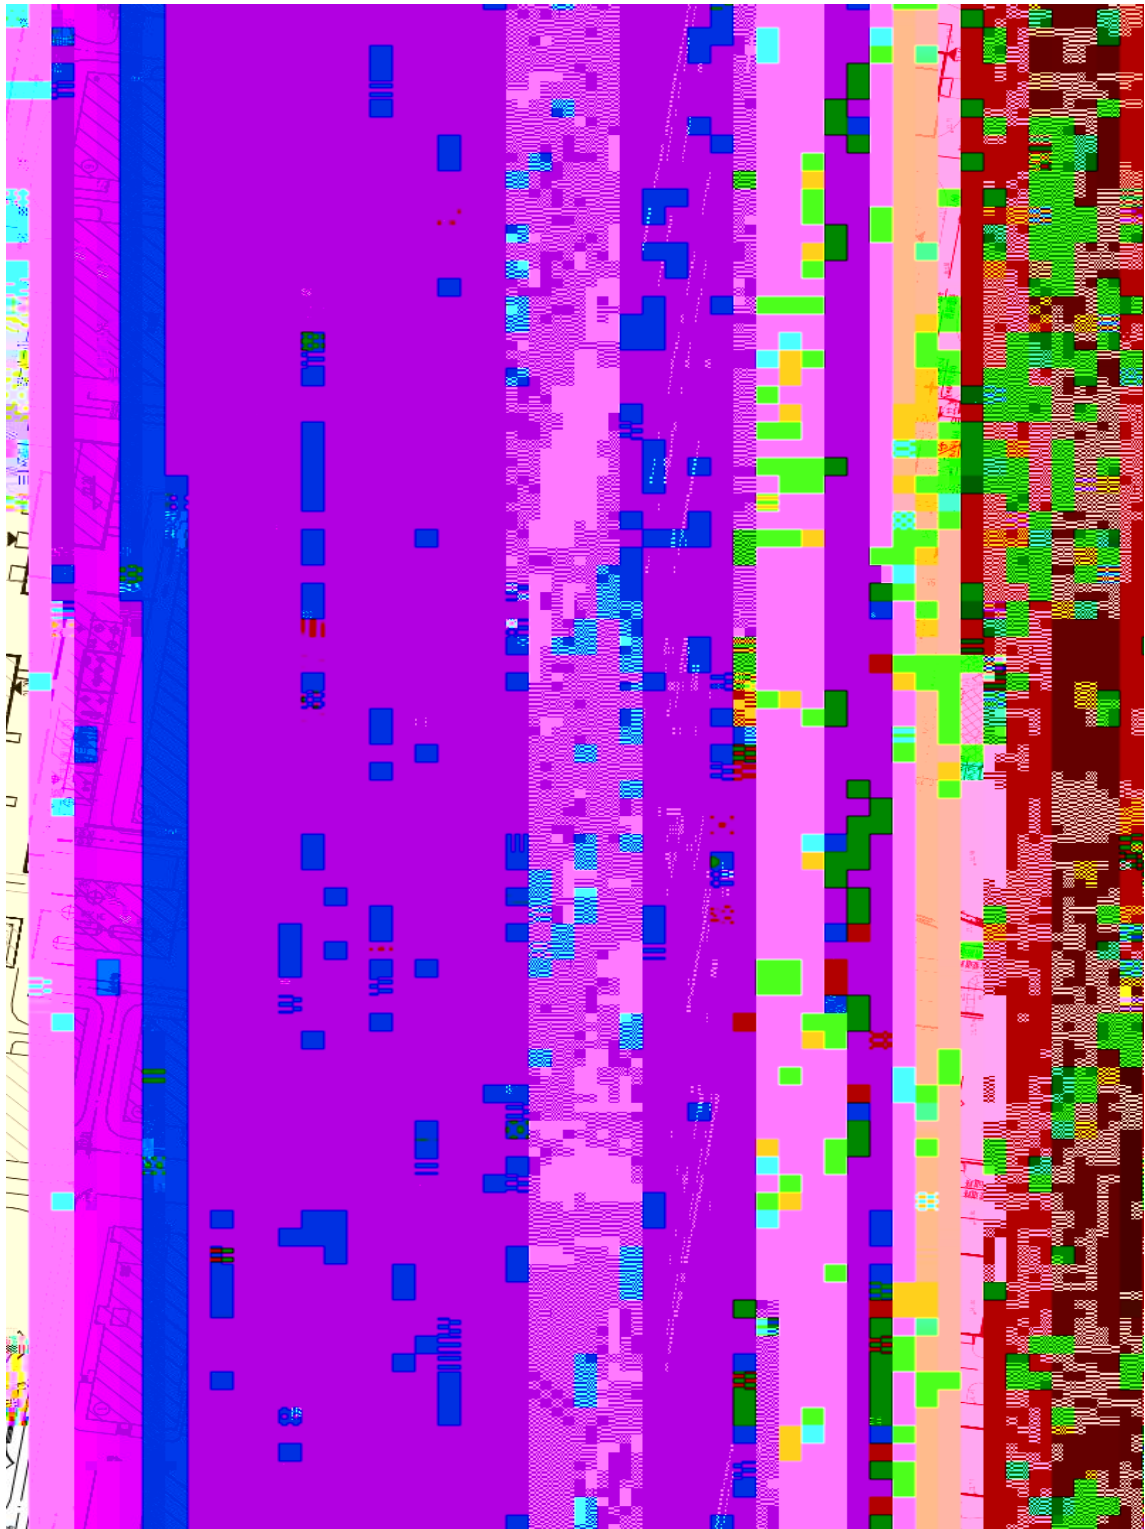

4

SCL

4-1

1				

5

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16


17

18

Ĉ

0(ĉ •ББ 8

↓



0#0

1

0 Y ç

17




2

2025 10

3 ,

n

0



1

19

20

21

22

23

24

25

26

27

28

29

30

31

32

2025 10 30

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18 SI L

19 HAZOP

20

21

22

23